



## MT55 | Compact Loaders



## Machine Rating

Rated operating capacity (ISO 5998)	254 kg
Tipping load (ISO 8313)	732 kg
Pump capacity	45.40 L/min
System relief at quick couplers	200.00 bar
Travel speed, reverse	2.3 km/h
Travel speed, forward	5.6 km/h

## Engine

Make / Model	Kubota / D902-E3B
Fuel	Diesel
Cooling	Liquid
Power at 3600 RPM	17.5 kW
Torque at 2600 RPM (ISO 9249)	54.2 Nm
Number of cylinders	3
Displacement	0.90 L
Fuel tank	26.50 L

## Weights

Operating weight	1186 kg
Shipping weight	1109 kg

## Controls

Vehicle steering	Direction and speed controlled by one hand lever
Loader hydraulics tilt and lift	Hand lever

## Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

## Standard Features

Auxiliary hydraulics	Parking brake
Bob-Tach™	Reverse travel stop panel
Built-in tie down and crane/lift locations	Spark arrestor muffler
Hydraulic drive train	Tilt lockout
Instrumentation	Tracks — rubber — 180 mm
Lift arm lockout with manual bypass	CE certification
Lift arm support	Warranty: 12 months or 2000 hours, whichever occurs first
Neutral start interlocks	


## Options

Attachment control kit	Light kit
Catalytic exhaust purifier	Ride-on platform
Engine block heater	Shutdown kit

## Environmental

Noise level LpA(EU Directive 2000/14/EC)	88 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	103 dB(A)
Hand-arm vibration (ISO 5349-1)	6.15 ms <sup>-2</sup>

## Dimensions

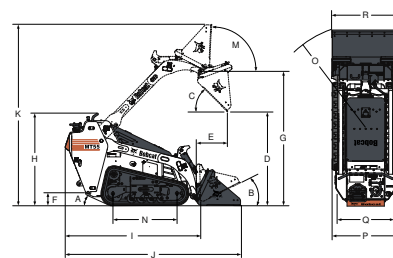

(A)	23°	(I)	1838.0 mm
(B)	168.0 mm	(J)	2365.0 mm
(C)	22°	(K)	2422.0 mm
(D)	50°	(L)	82°
(E)	1265.0 mm	(M)	863.0 mm
(F)	463.0 mm	(N)	1395.0 mm
(G)	114.0 mm	(O)	903.0 mm
(H)	1807.0 mm	(P)	724.0 mm
	1246.0 mm	(Q)	914.0 mm



www.bobcat.eu